

# Power Inductor

## Automotive Grade

### APSC Series



### Overview

Power inductors are passive electronic components used in various circuits to store energy in a magnetic field when electrical current flows through them. They are critical in filtering, energy storage, and noise suppression in power electronic systems.

They are designed to handle higher currents and are optimized for minimal power loss and thermal efficiency.

### Benefits

1. Automotive grade available
2. Ferrite SMD Shielded Type
3. No thermal aging

### Applications

1. Automotive Systems for Infotainment, Dashboard, ADAS
2. IPC Equipment
3. Net working

### Product Information

Series	L (mm)	W(mm)	T (mm)	Inductance (μH)
APSC	3.2	3.2	1.6	0.47 ~ 1000
	4.0	4.0	1.8	
	4.0	4.0	3.0	
	4.7	4.7	2.0	
	4.7	4.7	3.0	
	4.7	4.7	4.0	
	5.7	5.7	2.0	
	5.7	5.7	3.0	
	6.7	6.7	3.0	
	7.0	7.0	4.0	
	7.5	7.5	4.6	
	10.3	10.5	3.1	
	10.3	10.5	4.0	
	10.3	10.5	5.1	
	12.5	12.5	4.5	
12.5	12.5	6.0		
12.5	12.5	8.0		






# APSC00101151 Series Specification

AEC-Q200

## 6 Configuration and Dimensions and Unit Weight:

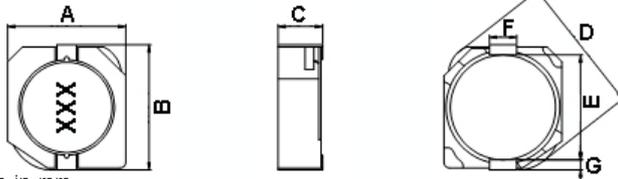

Dimensions in mm

TYPE	A	B	C	D	E	F	G
101151	10.3Max.	10.5Max.	5.1 Max.	13.5Max.	7.7	3.0	1.2

## Net Weight (grms)

SIZE CODE	Net Weight (grms)
101151	1.67(Typ.)

## 7 Electrical Characteristics:

Part No.	Inductance (uH)	Test Freq.	RDC (Ω)Max.	Isat(A) Max(Typ)	Irms (A)Typ.	Tolerance	Marking
APSC001011514R7□00	4.7	100 kHz, 1 V	0.014	5.6(7.8)	5	T	4R7
APSC001011516R8□00	6.8	100 kHz, 1 V	0.024	5.1(6.4)	4.7	T	6R8
APSC001011518R2□00	8.2	100 kHz, 1 V	0.027	4.7(5.9)	4.4	T	8R2
APSC00101151100□00	10	100 kHz, 1 V	0.028	4.4(5.6)	4.2	M,T	100
APSC00101151120□00	12	100 kHz, 1 V	0.036	3.4(5.8)	3.6	M,T	120
APSC00101151150□00	15	100 kHz, 1 V	0.041	3.2(4.5)	3.4	M,T	150
APSC00101151180□00	18	100 kHz, 1 V	0.046	3.0(3.8)	3.1	M,T	180
APSC00101151220□00	22	100 kHz, 1 V	0.061	2.8(3.6)	2.9	M,T	220
APSC00101151270□00	27	100 kHz, 1 V	0.069	2.1(3.2)	2.6	M,T	270
APSC00101151330□00	33	100 kHz, 1 V	0.084	2.0(2.9)	2.5	M,T	330
APSC00101151390□00	39	100 kHz, 1 V	0.106	1.9(2.6)	2.25	M,T	390
APSC00101151470□00	47	100 kHz, 1 V	0.13	1.7(2.3)	2	M,T	470
APSC00101151560□00	56	100 kHz, 1 V	0.149	1.6(2.2)	1.9	M,T	560
APSC00101151680□00	68	100 kHz, 1 V	0.201	1.5(2.0)	1.6	M,T	680
APSC00101151820□00	82	100 kHz, 1 V	0.227	1.3(1.8)	1.45	M,T	820
APSC00101151101□00	100	100 kHz, 1 V	0.253	1.2(1.7)	1.35	M,T	101
APSC00101151121□00	120	100 kHz, 1 V	0.303	1.1(1.5)	1.18	M,T	121
APSC00101151151□00	150	100 kHz, 1 V	0.42	1.0(1.3)	1	M,T	151
APSC00101151181□00	180	100 kHz, 1 V	0.45	0.9(1.2)	0.9	M,T	181
APSC00101151221□00	220	100 kHz, 1 V	0.54	0.8(1.1)	0.85	M,T	221
APSC00101151271□00	270	100 kHz, 1 V	0.672	0.75(0.99)	0.8	M,T	271
APSC00101151331□00	330	100 kHz, 1 V	0.812	0.74(0.92)	0.73	M,T	331
APSC00101151391□00	390	100 kHz, 1 V	0.953	0.62(0.83)	0.7	M,T	391
APSC00101151471□00	470	100 kHz, 1 V	1.29	0.60(0.77)	0.54	M,T	471
APSC00101151561□00	560	100 kHz, 1 V	1.43	0.47(0.71)	0.52	M,T	561

**NOTE:** □-tolerance M=±20% / T=±30%

1. Operating temperature range - 4 0 °C ~ 1 2 5 °C (Including self - temperature rise)
2. Isat for Inductance drop 35% from its value without current.
3. The actual use current is suggested not to be out of Isat\*80%
4. Irms for a 40°C temperature rise from 25°C ambient.


# APSC00101151 Series Specification

AEC-Q200

Part No.	Inductance (uH )	Test Freq.	RDC (Ω)Max.	Isat(A) Max(Typ)	Irms (A)Typ.	Tolerance	Marking
APSC00101151681□00	680	100 kHz, 1 V	1.6	0.46(0.65)	0.51	M,T	681
APSC00101151821□00	820	100 kHz, 1 V	1.77	0.42(0.57)	0.48	M,T	821
APSC00101151102□00	1000	100 kHz, 1 V	2.2	0.40(0.54)	0.4	M,T	102

**8 APSC00101151 Series**

**8.1 Construction:**

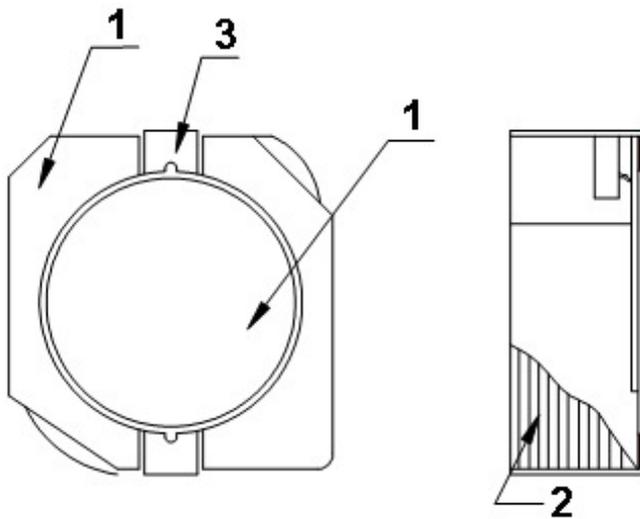


**8.2 Material List:**

No	Part	Material
1	Core	Ferrite
2	Wire	Magnet Wire
3	Terminal	Terminal Copper

**9 Reliability Of Ferrite Wire Wound Power Inductor**


**1-1.Mechanical Performance**

No	Item	Specification	Test Method
1-1-1	Board Flex	The forces applied on the right conditions must not damage the terminal electrode and the ferrite	Refer to AEC-Q200-005 Test device shall be soldered on the substrate Substrate Dimension: 100x40x1.6mm Deflection: 2.0mm Keeping Time: 60sec 
1-1-2	Resistance to Soldering Heat	Appearance: No damage Inductance change shall be within $\pm 10\%$ .	Refer to MIL-STD-202 Method 210 Pre-heating: 150°C, 1min Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free) Solder Temperature: 250 $\pm$ 5°C Immersion Time: 10 $\pm$ 1sec
1-1-3	Solder ability	The electrodes shall be at least 95% covered with new solder coating	Refer to J-STD-002 Pre-heating: 150°C, 1min Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free) Solder Temperature: 245 $\pm$ 5°C (Pb-Free) Immersion Time: 4 $\pm$ 1sec
1-1-4	Terminal Strength Test	Appearance: No damage	Refer AEC-Q200-006 Soldered on PCB for testing as fig. Force : 1.8kg Keeping Time: 60 seconds.
1-1-5	Resistance to Solvent	There must be no change in appearance or obliteration of marking	Refer to MIL-STD-202 Method 215 Inductors must withstand 6 minutes of alcohol or water Sample Size : 15 pcs
1-1-6	Vibration	Appearance: No damage Inductance change shall be within $\pm 10\%$ .	Refer MIL-STD-202 Method 204 Vibration waveform: Sine waveform Vibration frequency: 10Hz~2000Hz Vibration acceleration: 5g Sweep rate: 0.764386octave/minute Duration of test: 12 cycles each of 3 orientations, 20 minutes for each cycle Vibration axes: X, Y & Z

**1-2.Environmental Performance**

No	Item	Specification	Test Method
1-2-1	Temperature Cycle	Appearance: No damage Inductance change shall be within $\pm 30\%$	Refer to JESD Method JA-104 Total cycles: 1000 cycles Temperature Cycling Test Conditions : -40 to +125 °C -40 °C Soak Mode Condition : 30 minutes 125 °C Soak Mode Condition : 30 minutes Measured after exposure in the room condition for 24hrs
1-2-2	Biased Humidity Resistance		Refer to MIL-STD-202 Method 103 Temperature: 85 $\pm$ 2°C Relative Humidity:85% / Time: 1000hrs Measured after exposure in the room condition for 24hrs
1-2-3	High Temperature Exposure (Storage)		Refer to MIL-STD-202 Method 108 Temperature: 125 $\pm$ 3°C Time: 1000hrs Measured after exposure in the room condition for 24hrs
1-2-4	Operational Life		Refer to MIL-STD-202 Method 108 Temperature: 125 $\pm$ 3°C Applied Current : Rated Current Time: 1000hrs Measured after exposure in the room condition for 24hrs

Reflow Soldering Profile

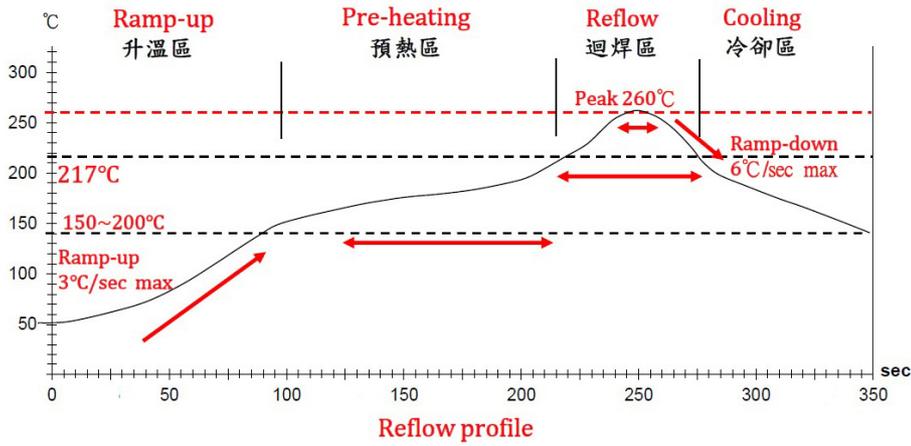

Lead-Free(LF)標準溫度分析範圍


Refer to J-STD-020C

管制項目 Item.	升温區 Ramp-up	预热區 Pre-heating	迴焊區 Reflow	Peak Temp	冷卻區 Cooling
溫度範圍 Temp.scope	R.T ~ 150°C	150°C ~ 200°C	217°C	260±5°C	Peak Temp.~150°C
標準時間 Time spec.	-	60 ~ 180 sec	60 ~ 150 sec	20 ~ 40 sec	-
實際時間 Time result	-	75 ~ 100 sec	90 ~ 120 sec	20 ~ 35 sec	-

**10 Packaging:**

**10.1 Packaging -Cover Tape**


The force for tearing off cover tape is 10 to 130 grams in the arrow direction.

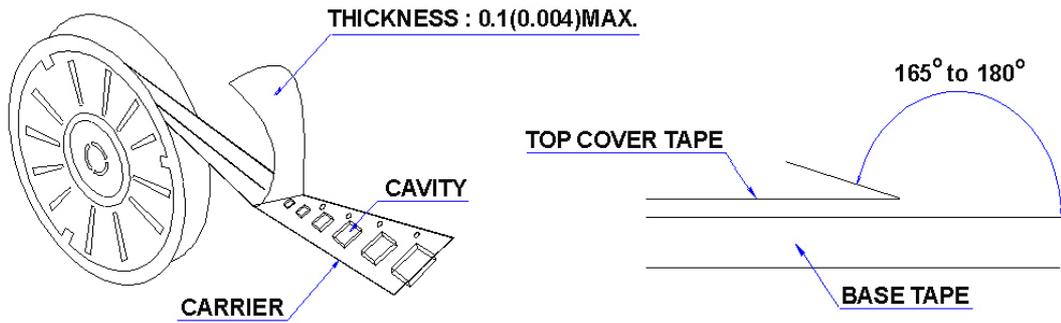

**10.2 Packaging Quantity**

TYPE	PCS/REEL
101151	500

**10.3 Reel Dimensions**

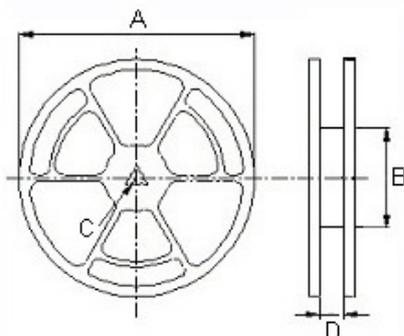


Dimensions in mm

TYPE	A	B	C	D
101151	330	100	13	24.4

**10 Packaging:**

**10.4 Tape Dimensions in mm**

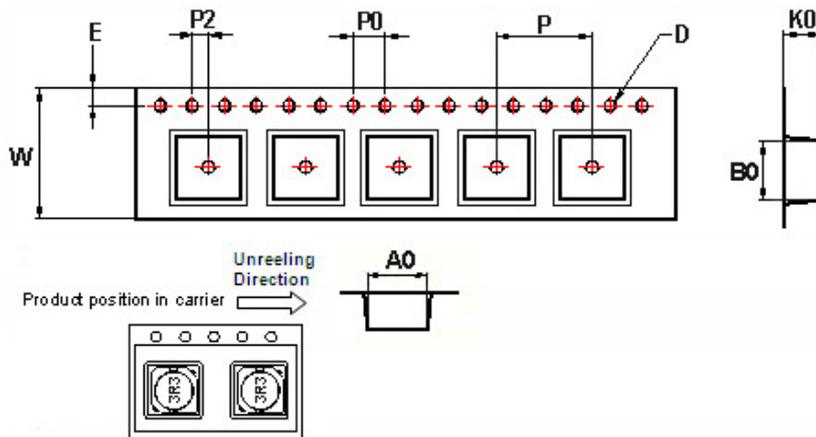

TYPE	A0	B0	K0	D	E	W	P	P0	P2
101151	10.6	10.6	5.0	1.55	1.75	24	16	4	2

**11 Recommended Land Pattern:**



Dimensions in mm



TYPE	A	B	C
101151	1.6	7.3	3.2

**12 Note:**



1. Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.
2. Do not knock nor drop.
3. All the items and parameters in this product specification have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment agreed upon between you and us. You are requested not to use our product deviating from such agreement.
4. Please keep the distance between transformer/coil and other components (refer to the standard IEC 950)
5. The moisture sensitivity level (MSL) of products is classified as level 1.

**13** Graph:



APSC001011514R7□00

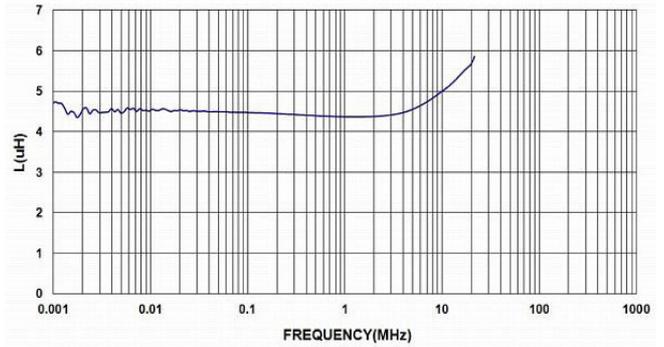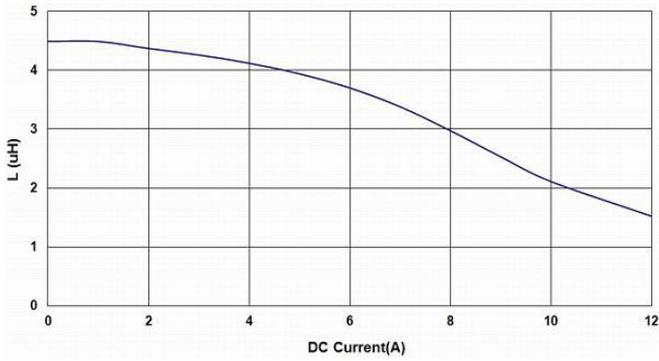


APSC001011516R8□00

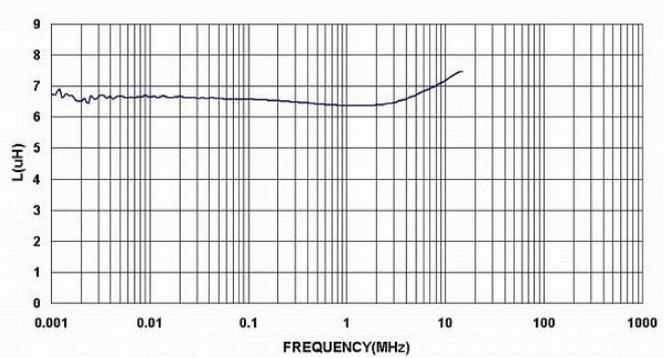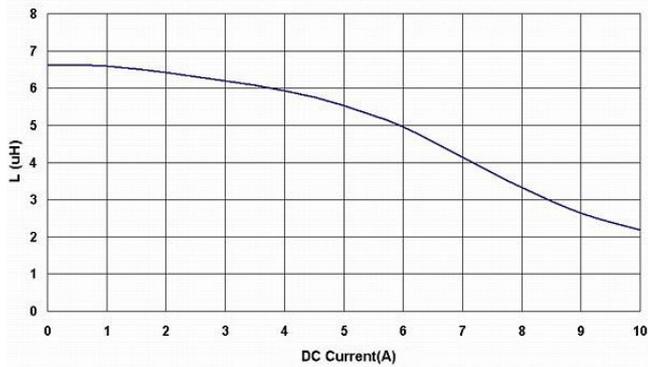

APSC001011518R2□00

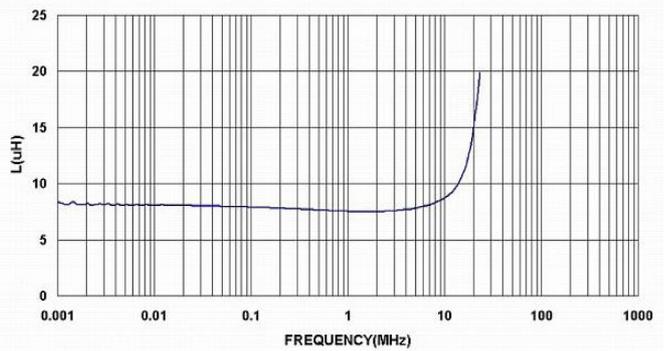
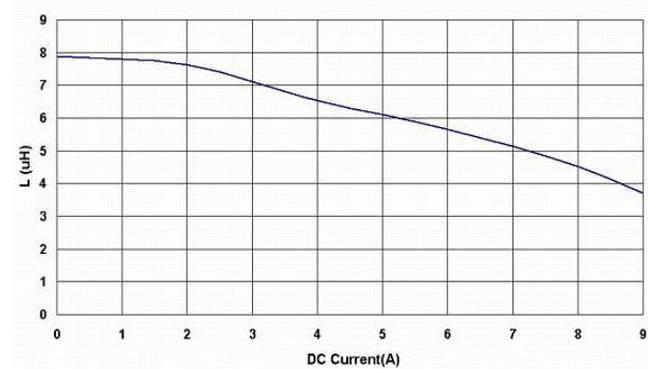


APSC00101151100□00

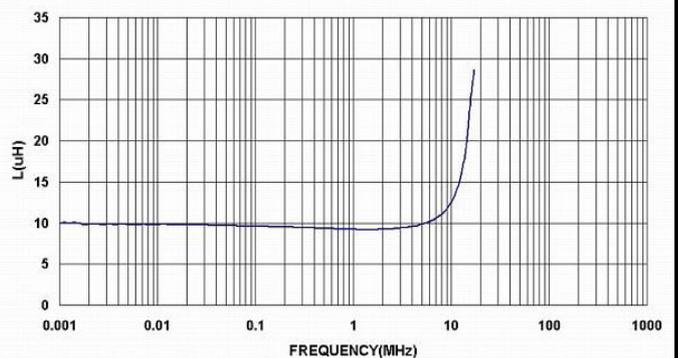


**13** Graph:



APSC00101151120□00

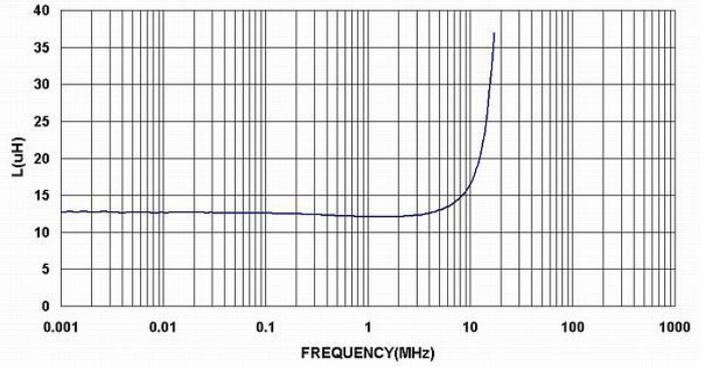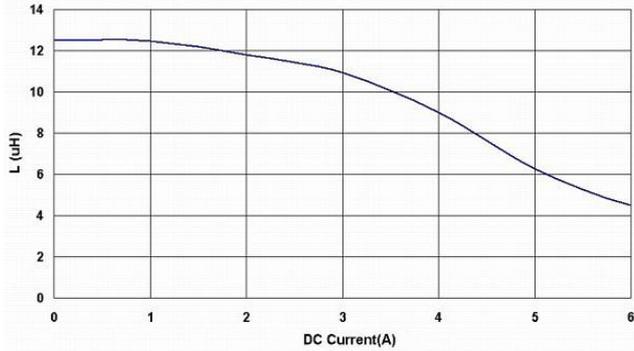



APSC00101151150□00

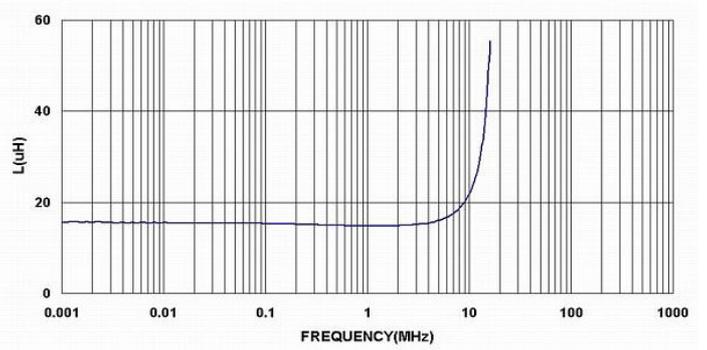

APSC00101151180□00

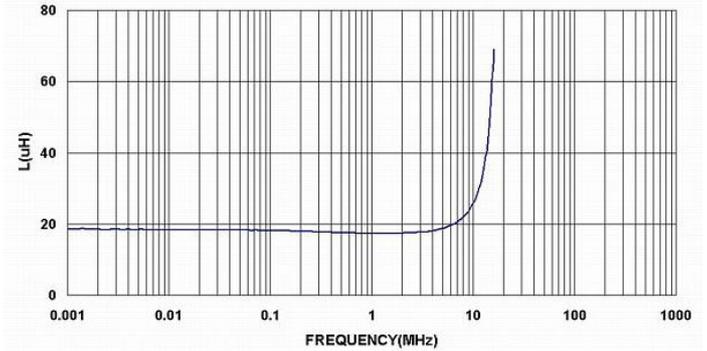
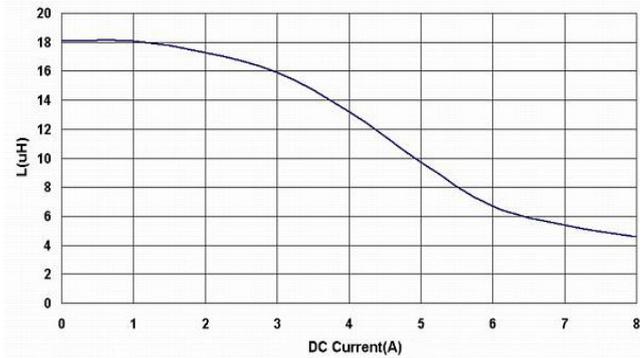


APSC00101151220□00

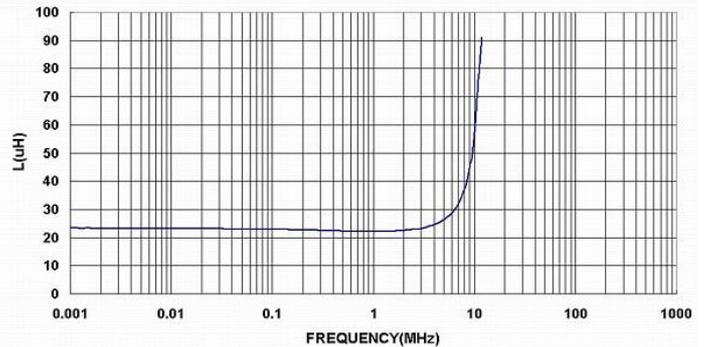
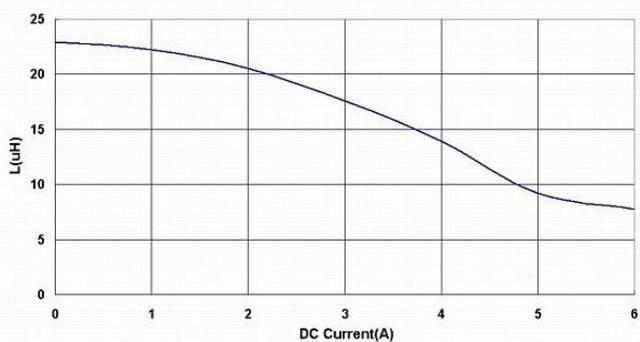


**13** Graph:


APSC00101151270□00

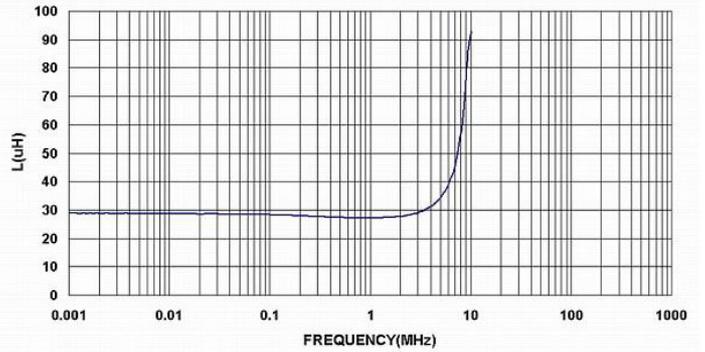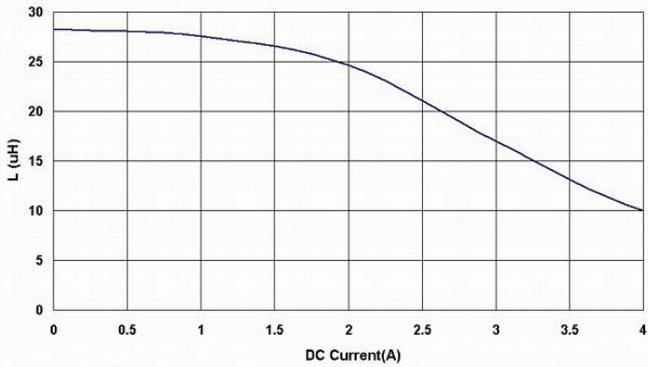



APSC00101151330□00

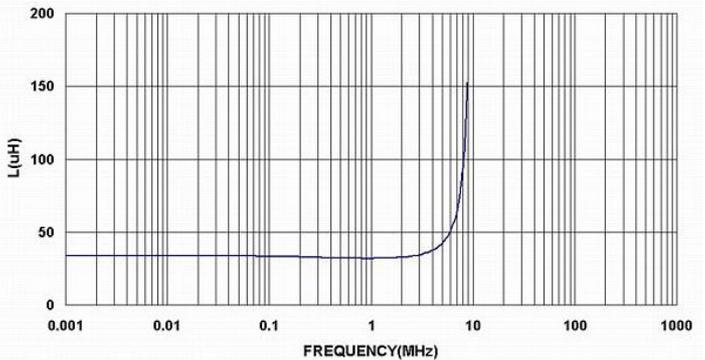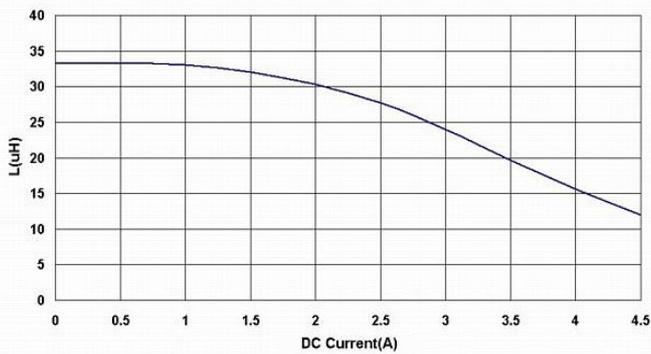

APSC00101151390□00


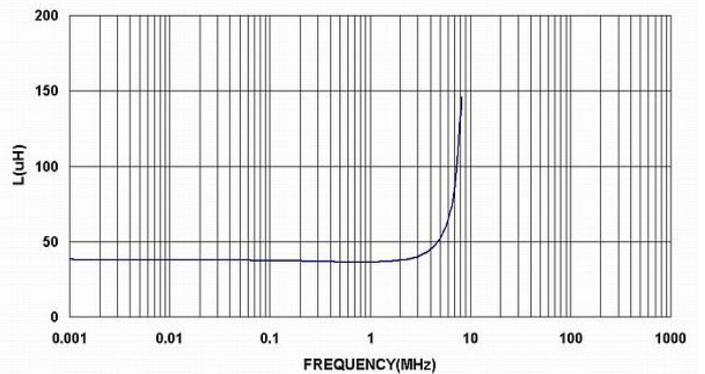


APSC00101151470□00

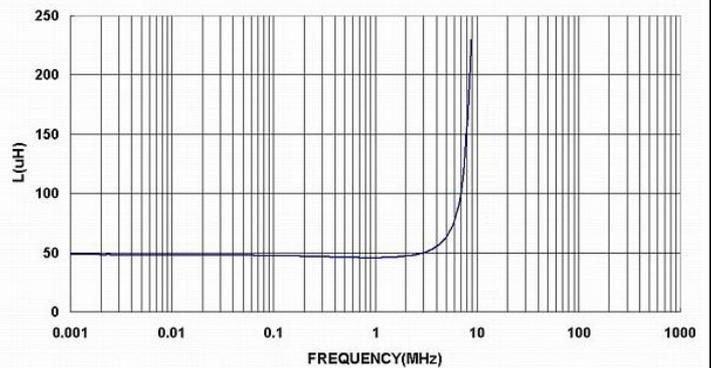
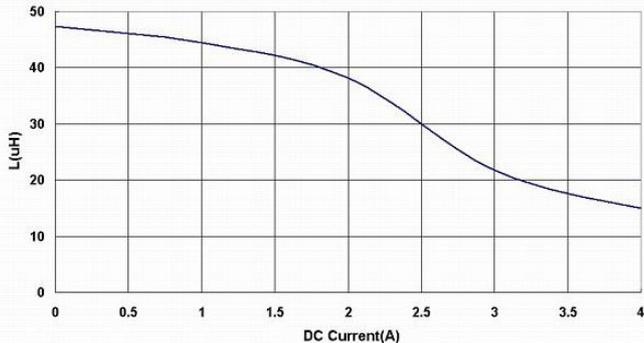


**13** Graph:



APSC00101151560□00

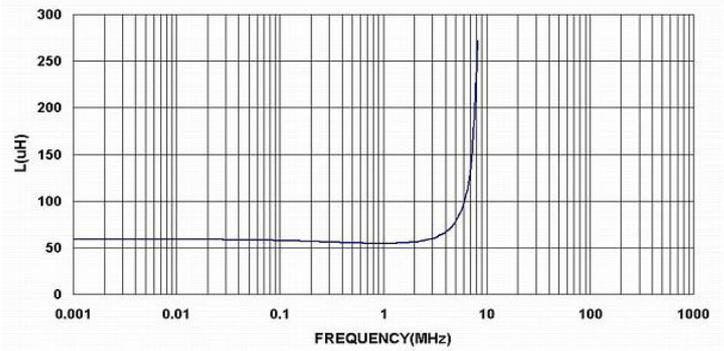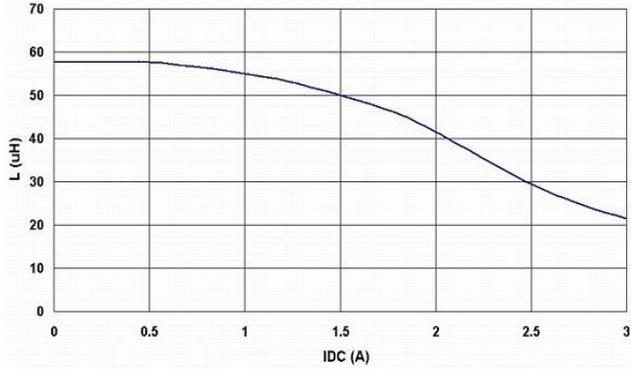



APSC00101151680□00

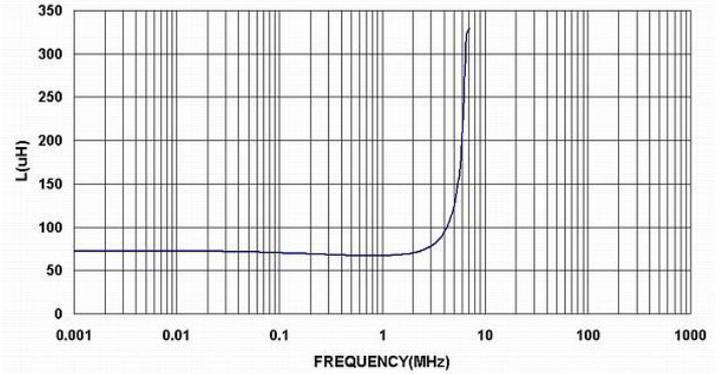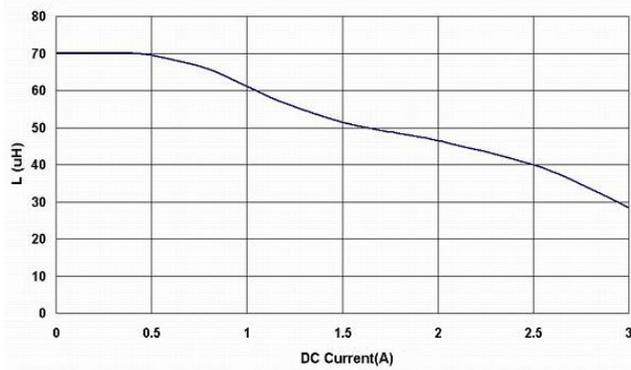

APSC00101151820□00

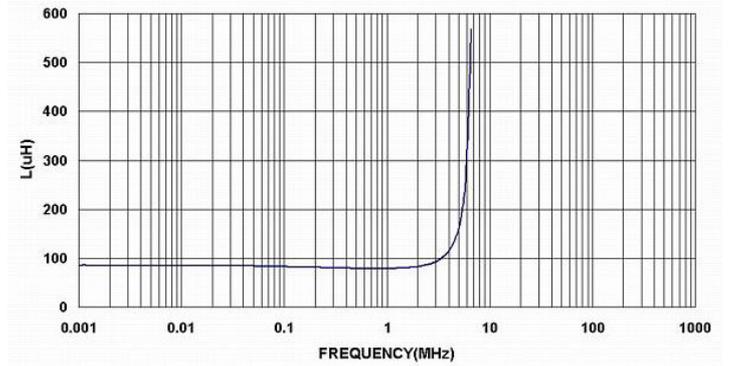
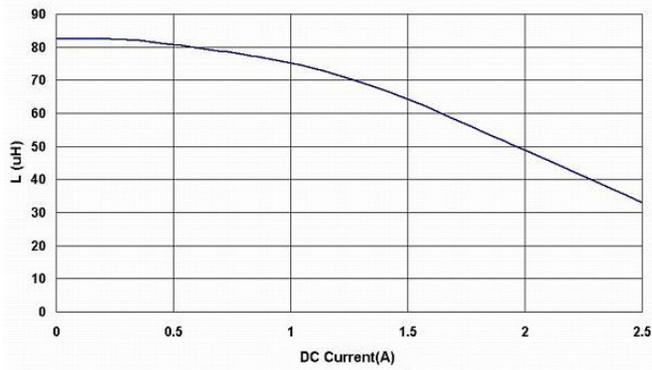


APSC00101151101□00

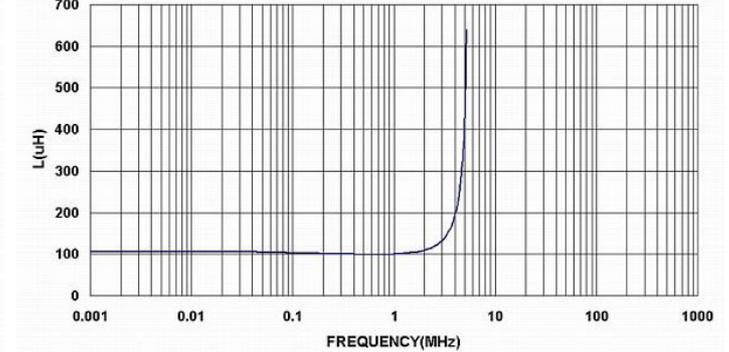
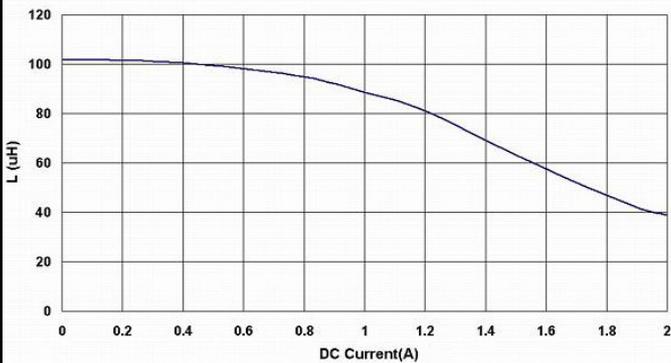


**13 Graph:**



APSC00101151121□00

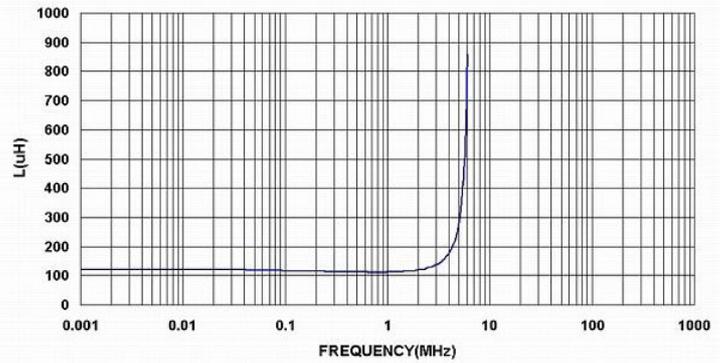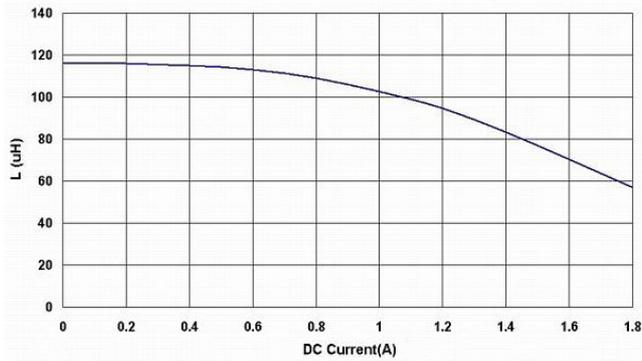



APSC00101151151□00

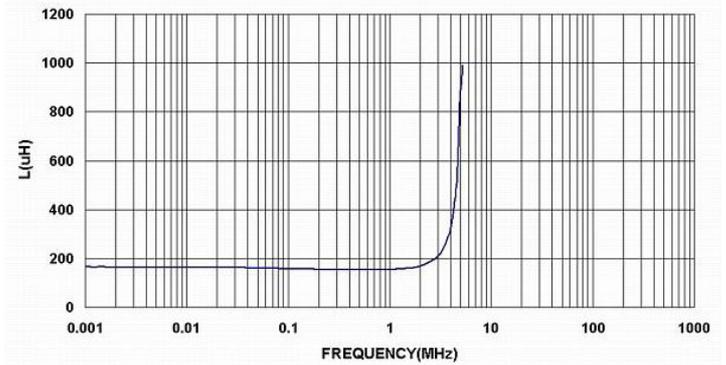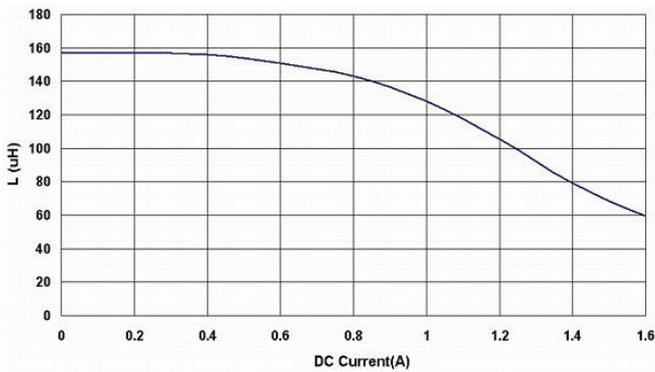

APSC00101151181□00

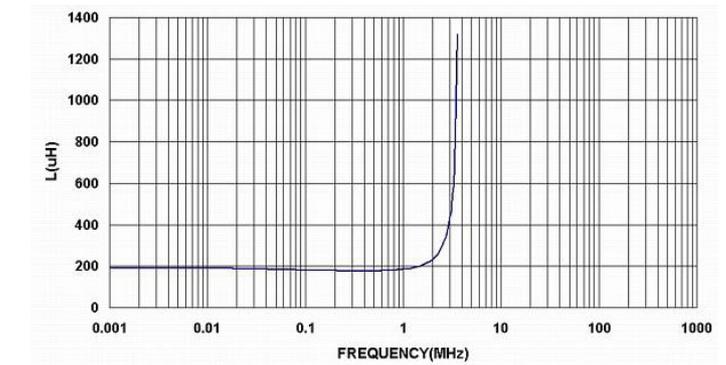
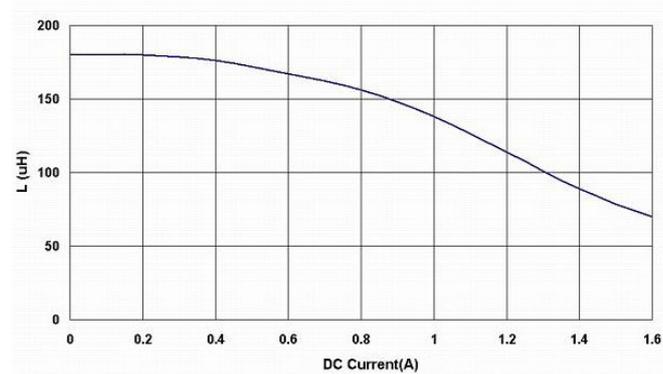


APSC00101151221□00

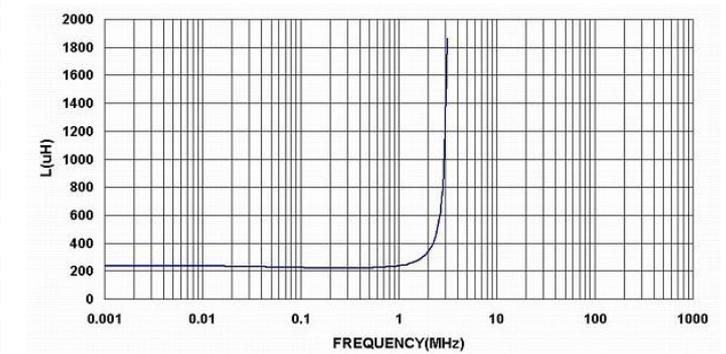
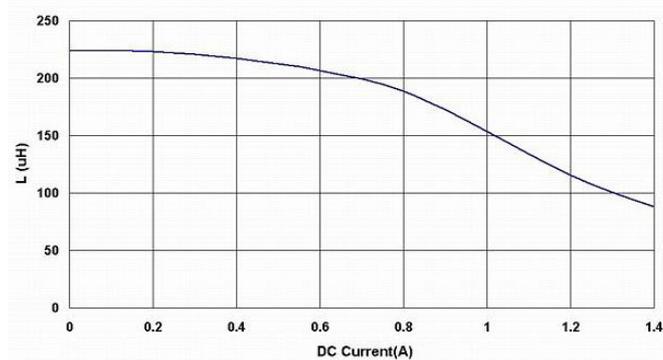


**13** Graph:



APSC00101151271□00

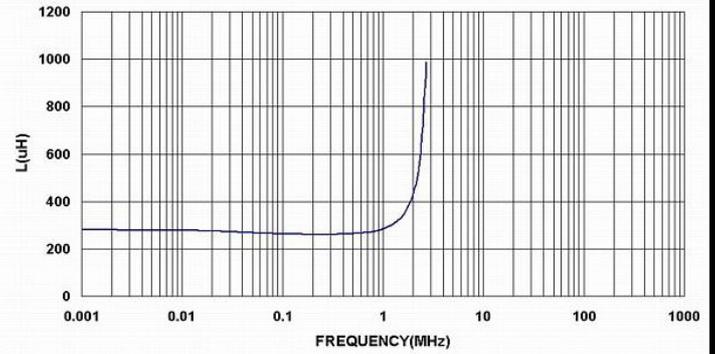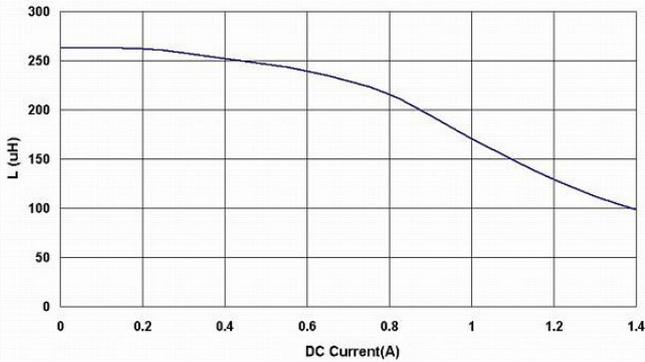



APSC00101151331□00

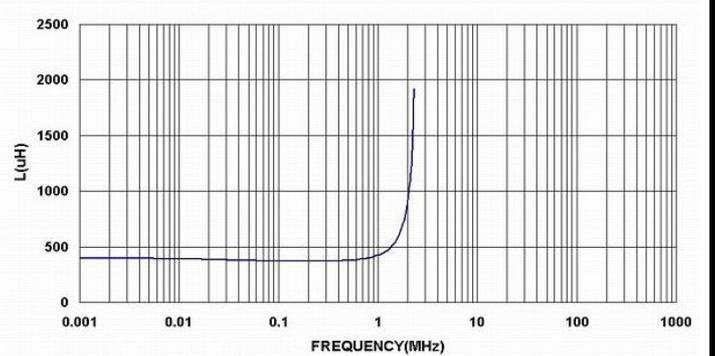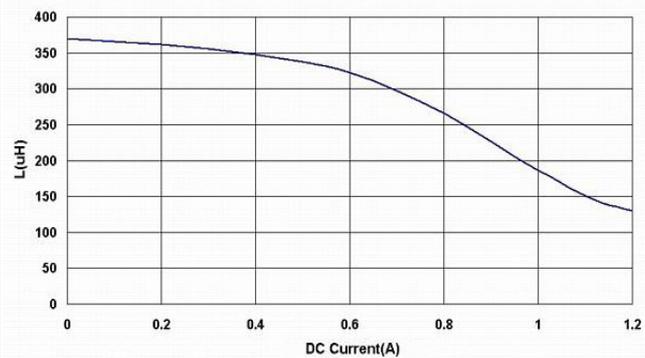

APSC00101151391□00

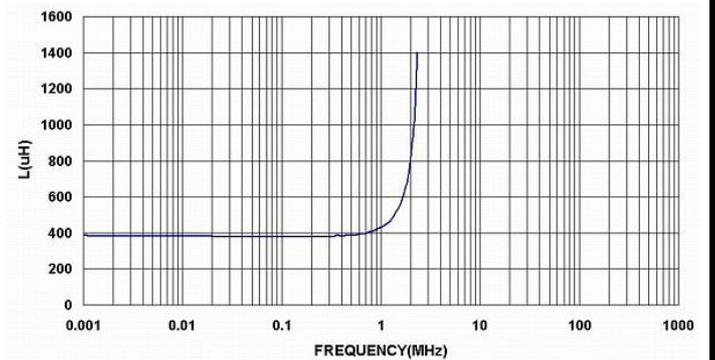
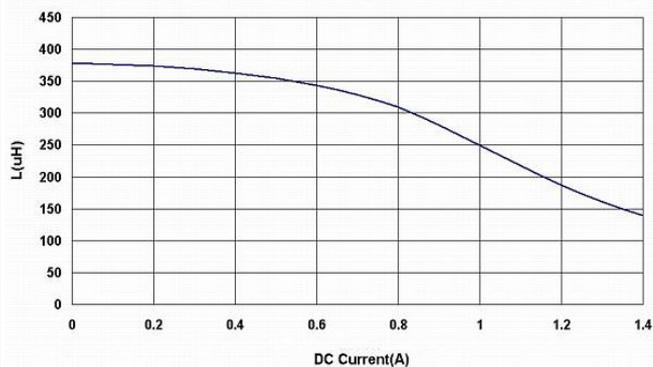


APSC00101151471□00

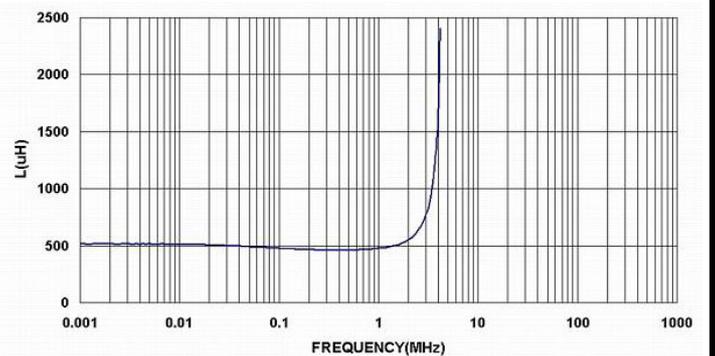
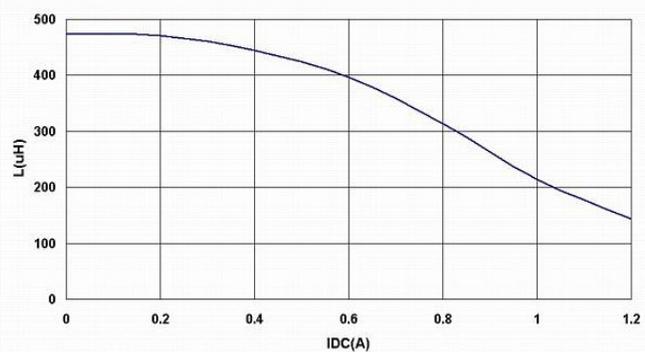


**13 Graph:**



APSC00101151561□00

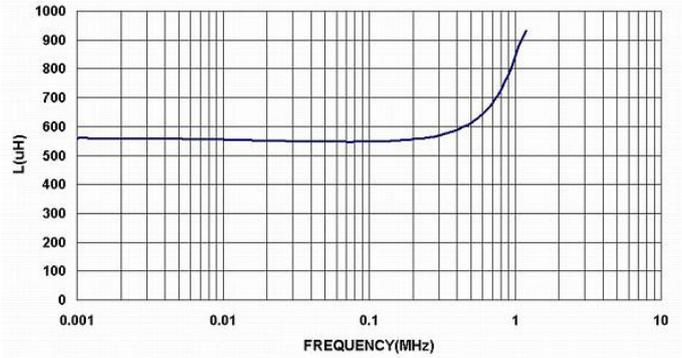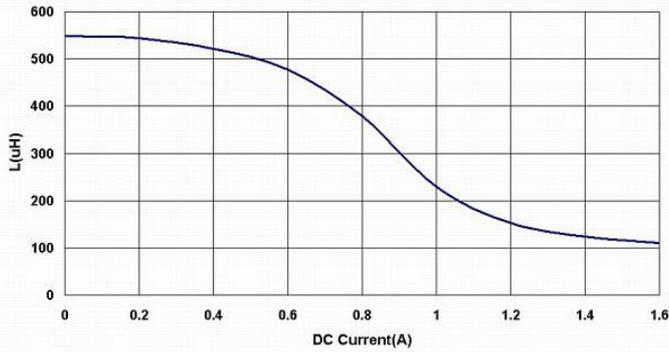

APSC00101151681□00

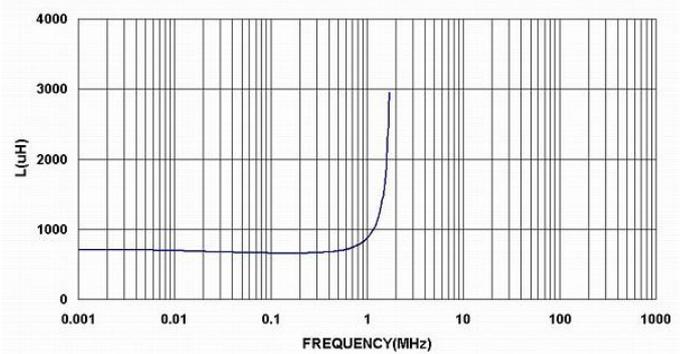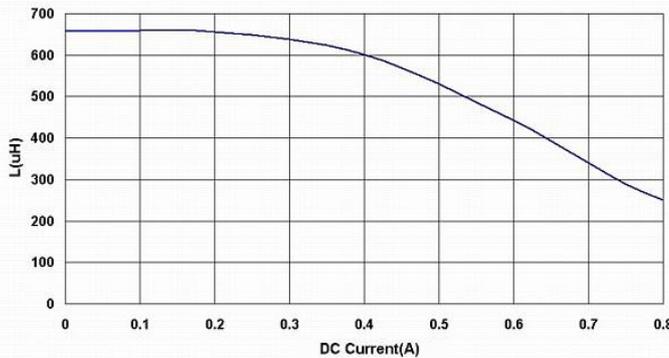

APSC00101151821□00

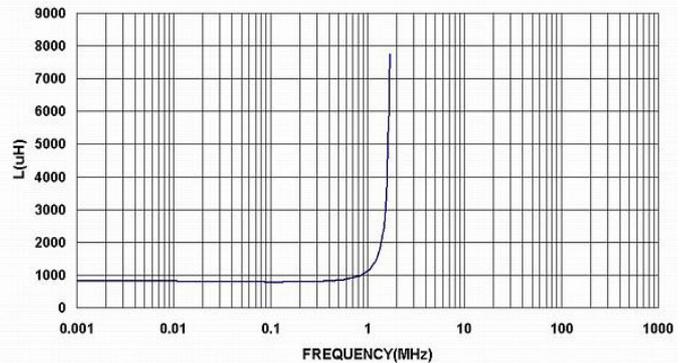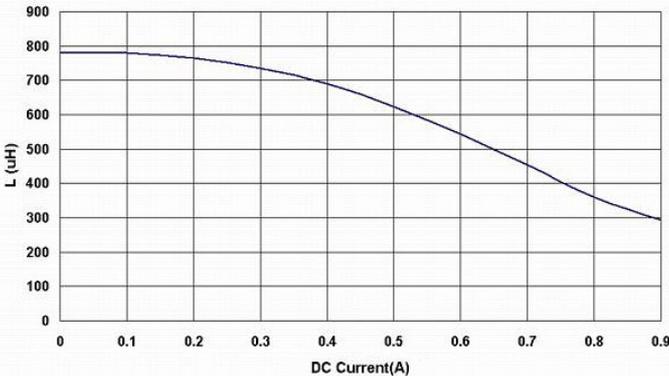

APSC00101151102□00

