

EMI Ferrite Bead



BBBK Series



Overview

EMI ferrite beads are made of ferrite material, which can block high-frequency noise while allowing required signals to pass through, providing high impedance and noise attenuation to improve signal integrity/efficiency and reduce power loss.

Benefits

1. Compliance with EMI regulations.
2. Reduced power loss and improved system efficiency
3. Operating temperature range: -55 ~ +125°C
4. Improved signal integrity

Applications

1. Wearable Devices
2. Industrial
3. Communications
4. Consumer Electronics

Product Information


Series	Size Code (JIS/EIA)	Impedance (Ω)
BBBK	1608/0603 2012/0805 3216/1206	10 ~ 2700



BBBK00321611 Series Specification

1 **Scope:** This specification applies to MULTILAYER FERRITE CHIP BEADS

2 **Part Numbering:**

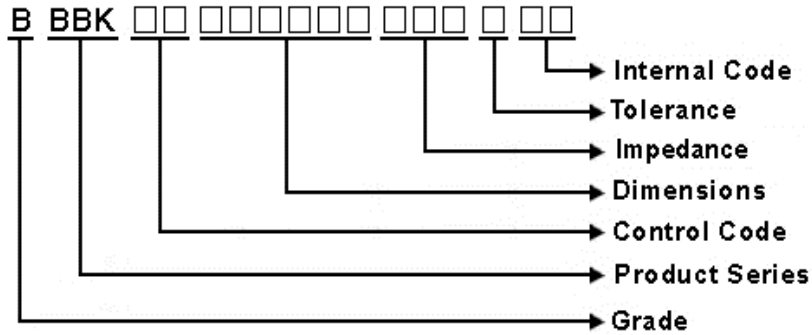

3 **Rating:**

Operating Temperature: - 5 5 °C ~ 1 2 5 °C(Including self - temperature rise)

Storage Temperature: - 5 5 °C ~ 1 2 5 °C(after PCB)
 - 5 °C~ 4 0 °C, Humidity 4 0 %~ 7 0 %(before PCB)

4 **Marking:**


No Marking

5 **Standard Testing Condition**

	Unless otherwise specified	In case of doubt
Temperature	Ordinary Temperature(15 to 35°C)	20 to 30°C
Humidity	Ordinary Humidity(25 to 85% RH)	50 to 80 %RH

BBBK00321611Series Specification

6 Configuration and Dimensions:



Dimensions in mm	
TYPE	321611
A	3.2±0.20
B	1.6±0.20
C	1.1±0.20
D	0.5±0.30


Net Weight (grms)	
Size Code	Net Weight (grms)
321611	0.02584

7 Electrical Characteristics:

Part No.	Impedance (Ω)	Test Freq.	RDC (Ω)Max.	Rated Current (mA)Max.
BBBK00321611700Y00	70	100 MHz,200 mV	0.1	500
BBBK00321611800Y00	80	100 MHz,200 mV	0.15	500
BBBK00321611900Y00	90	100 MHz,200 mV	0.15	500
BBBK00321611101Y00	100	100 MHz,200 mV	0.15	500
BBBK00321611121Y00	120	100 MHz,200 mV	0.15	500
BBBK00321611151Y00	150	100 MHz,200 mV	0.15	500
BBBK00321611221Y00	220	100 MHz,200 mV	0.2	400
BBBK00321611301Y00	300	100 MHz,200 mV	0.2	400
BBBK00321611401Y00	400	100 MHz,200 mV	0.2	400
BBBK00321611471Y00	470	100 MHz,200 mV	0.2	400
BBBK00321611501Y00	500	100 MHz,200 mV	0.2	400
BBBK00321611601Y00	600	100 MHz,200 mV	0.3	400
BBBK00321611102Y00	1000	50 MHz,200 mV	0.4	200
BBBK00321611122Y00	1200	50 MHz,200 mV	0.4	200
BBBK00321611152Y00	1500	50 MHz,200 mV	0.45	200
BBBK00321611202Y00	2000	30 MHz,200 mV	0.6	200
BBBK00321611272Y00	2700	30 MHz,200 mV	0.6	300

NOTE: □-tolerance Y=±25% / T=±30%


1. Operating temperature range - 5 5°C ~ 1 2 5°C(Including self - temperature rise)
2. Rate Current : Applied the current to coils, the temperature rise shall not be more than 30°C
3. As for BBPY type. Rated Current is derated as right figure depending on the operating temperature.



BBBK00321611 Series Specification

8 BBBK00321611 Series

8.1 Construction:

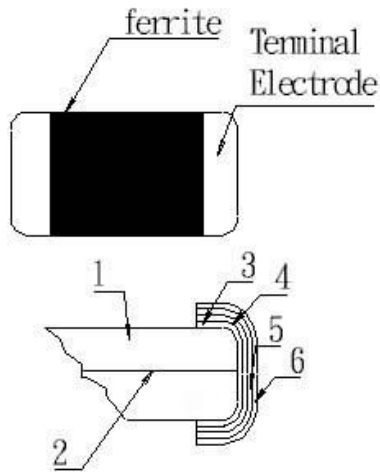



8.2 Material List:

No	Part	Material
1	Ferrite Substance	NiO-CuO-ZnO-Ferrite
2	Silver electrode	Ag
3	Silver electrode	Ag
4	Cu plating	Cu
5	Ni plating	Ni
6	Sn plating	Sn

BBBK00321611 Series Specification

9 Reliability Of Ferrite Multilayer Chip Bead


1-1.Mechanical Performance

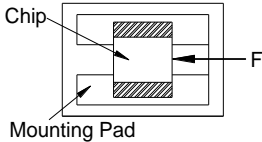No	Item	Specification	Test Method
1-1-1	Flexure Strength	The forces applied on the right conditions must not damage the terminal electrode and the ferrite	Test device shall be soldered on the substrate Substrate Dimension: 100x40x1.6mm Deflection: 2.0mm Keeping Time: 30sec *For 100505, substrate dimension is 100x40x0.8mm 
1-1-2	Vibration		Test device shall be soldered on the substrate Oscillation Frequency: 10 to 55 to 10Hz for 1min Amplitude: 1.5mm Time: 2hrs for each axis (X, Y & Z), total 6hrs
1-1-3	Resistance to Soldering Heat	Appearance: No damage More than 75% of the terminal electrode should be covered with solder. Impedance : within $\pm 30\%$ of initial value	Pre-heating: 150°C, 1min Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free) Solder Temperature: 260 \pm 5°C Immersion Time: 10 \pm 1sec
1-1-4	Solder ability	The electrodes shall be at least 95% covered with new solder coating	Pre-heating: 150°C, 1min Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free) Solder Temperature: 245 \pm 5°C (Pb-Free) Immersion Time: 4 \pm 1sec
1-1-5	Terminal Strength Test	No split termination  Chip Mounting Pad	Test device shall be soldered on the substrate, then apply a force in the direction of the arrow. Force : 5N Keeping Time: 10 \pm 1sec

1-2.Environmental Performance

No	Item	Specification	Test Method															
1-2-1	Temperature Cycle	Appearance: No damage Impedance: within $\pm 30\%$ of initial value	One cycle: <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> <th>Time (min)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-55\pm3</td> <td>30</td> </tr> <tr> <td>2</td> <td>25\pm2</td> <td>3</td> </tr> <tr> <td>3</td> <td>125\pm3</td> <td>30</td> </tr> <tr> <td>4</td> <td>25\pm2</td> <td>3</td> </tr> </tbody> </table> Total: 100cycles Measured after exposure in the room condition for 24hrs	Step	Temperature (°C)	Time (min)	1	-55 \pm 3	30	2	25 \pm 2	3	3	125 \pm 3	30	4	25 \pm 2	3
Step	Temperature (°C)	Time (min)																
1	-55 \pm 3	30																
2	25 \pm 2	3																
3	125 \pm 3	30																
4	25 \pm 2	3																
1-2-2	Humidity Resistance		Temperature: 40 \pm 2°C Relative Humidity: 90 ~ 95% / Time: 1000hrs Measured after exposure in the room condition for 24hrs															
1-2-3	High Temperature Resistance		Temperature: 125 \pm 3°C / Relative Humidity: 0% Applied Current: Rated Current /Time: 1000hrs Measured after exposure in the room condition for 24hrs															
1-2-4	Low Temperature Resistance		Temperature: -55 \pm 3°C Relative Humidity: 0% / Time: 1000hrs Measured after exposure in the room condition for 24hrs															

BBBK00321611 Series Specification

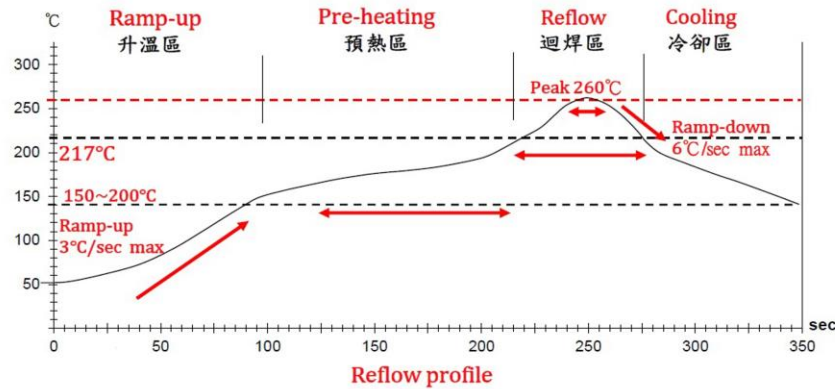

Lead-Free(LF)標準溫度分析範圍

Refer to J-STD-020C

管制項目 Item.	升温區 Ramp-up	預熱區 Pre-heating	迴焊區 Reflow	Peak Temp	冷卻區 Cooling
溫度範圍 Temp.scope	R.T ~ 150°C	150°C ~ 200°C	Above 217°C	260±5°C	Peak Temp.~150°C
標準時間 Time spec.	-	60 ~ 180 sec	60 ~ 150 sec	20 ~ 40 sec	-
實際時間 Time result	-	75 ~ 100 sec	90 ~ 120 sec	20 ~ 35 sec	-

NOTE :


1. Re-flow possible times : within 2 times
2. Nitrogen adopted is recommended while in re-flow
3. Products can only be soldered with reflow

BBBK00321611 Series Specification

11 Packaging:

11.1 Packaging -Cover Tape


The force for tearing off cover tape is 10 to 100 grams in the arrow direction.

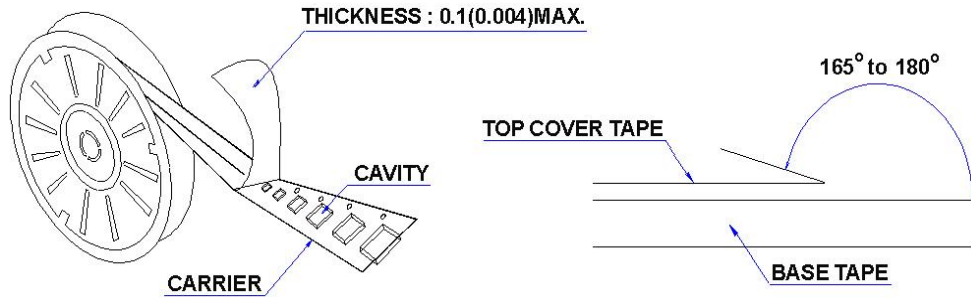

11.2 Packaging Quantity

TYPE	PCS/REEL
321611	3000

11.3 Reel Dimensions


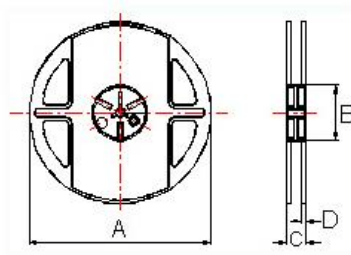


TYPE	A	B	C	D
321611	178	60	12	1.5

BBBK00321611 Series Specification


11 Packaging:

11.4 Tape Dimensions in mm



TYPE	A	B	T	W	P	F	K
321611	1.88	3.50	0.22	8	4	3.5	1.27

12 Recommended Land Pattern:

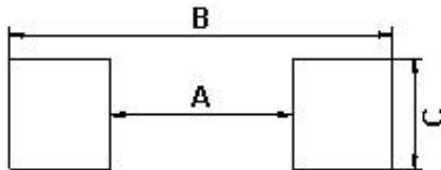

Dimensions in mm









TYPE	A	B	C
321611	2.0~2.4	4.2~5.2	1.3~1.9

13 Note:

1. Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.
2. Do not knock nor drop.
3. All the items and parameters in this product specification have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment agreed upon between you and us. You are requested not to use our product deviating from such agreement.
4. Please keep the distance between transformer/coil and other components (refer to the standard IEC 950)
5. The moisture sensitivity level (MSL) of products is classified as level 1.









BBBK00321611 Series Specification

14 Graph:

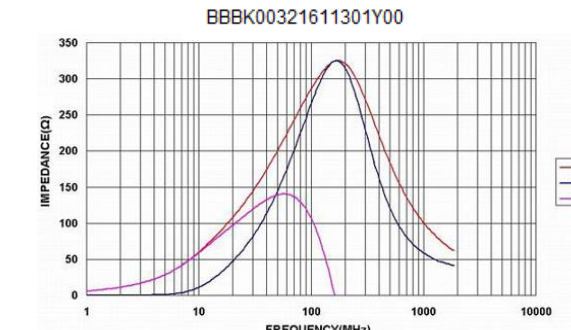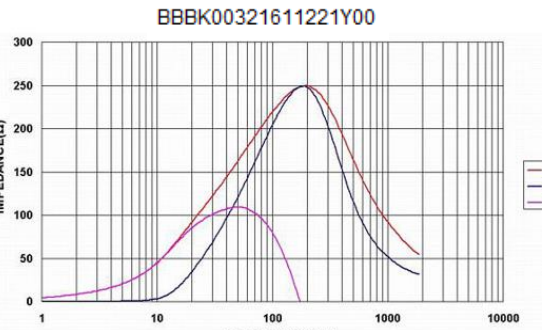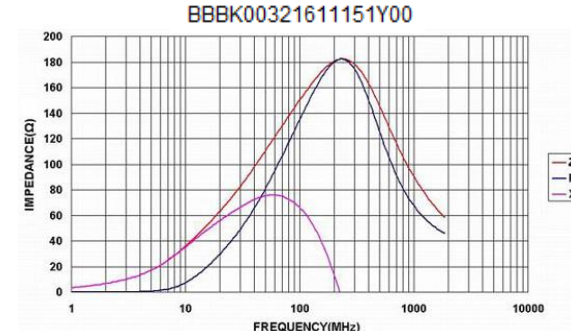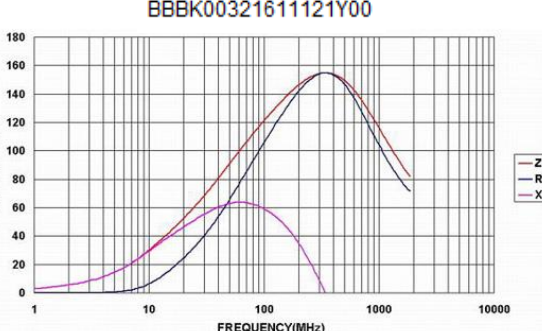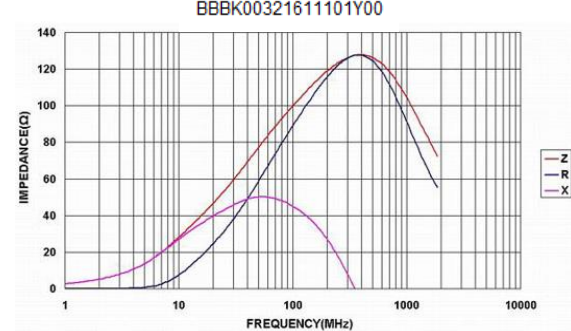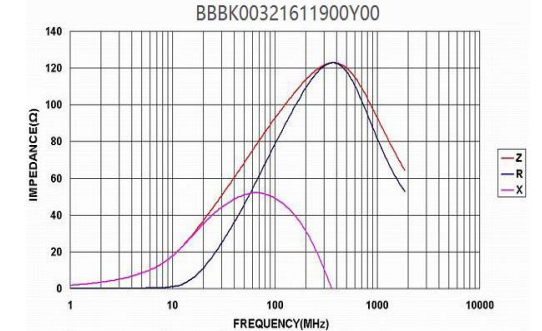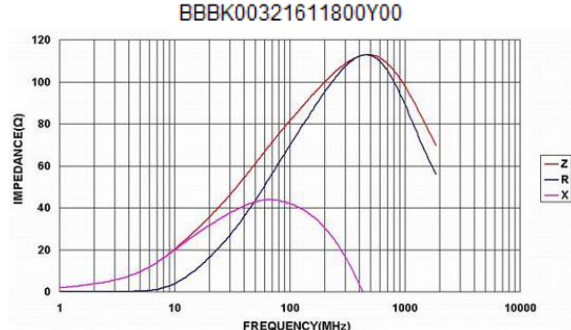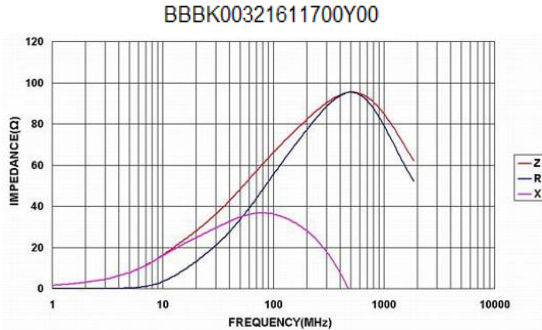

BBBK00321611 Series Specification

14 Graph:

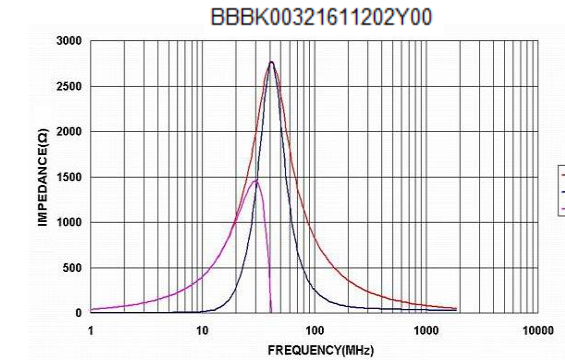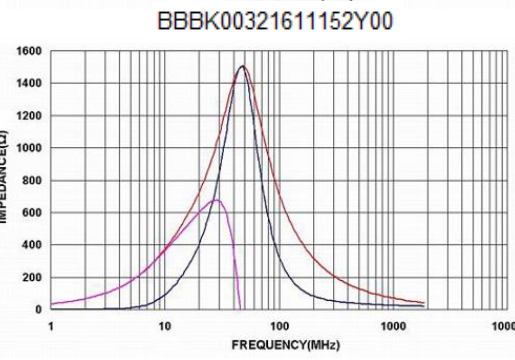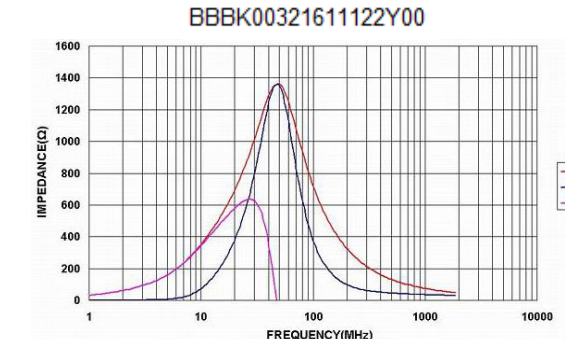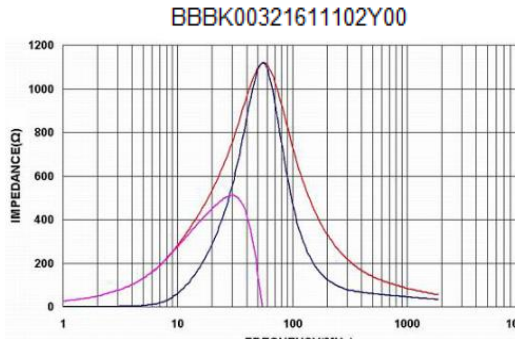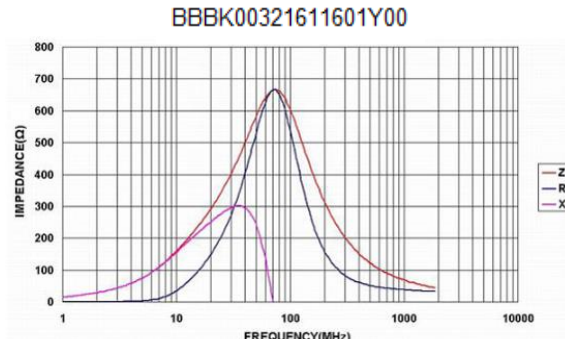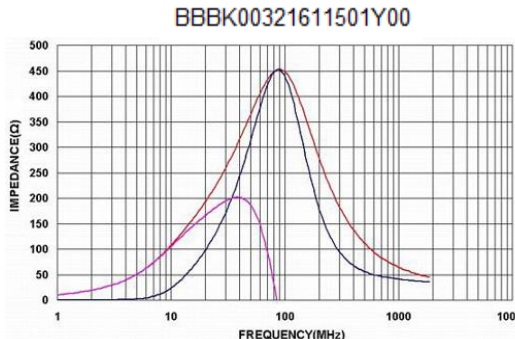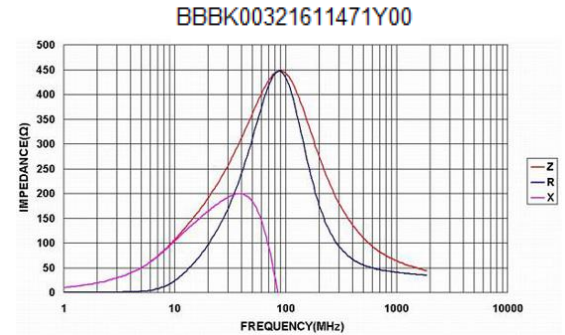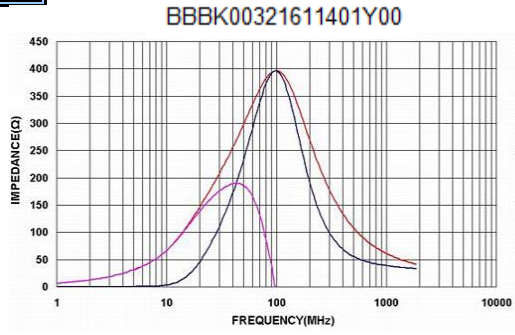

BBBK00321611 Series Specification

14 Graph:

BBBK00321611272Y00

