


Description: 18184+25254 GNSS&L2L5
Stack Patch Antenna

PART NUMBER : ANT1825BS0XTGN25S

Features:

- Size : Stack 18x18x4+25x25x4mm
- High radiation efficiency
- Combining GNSS and L2L5 bands
- Pin-solder process
- RoHS compliant

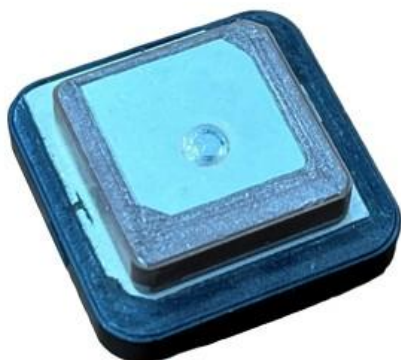

Applications:

- GNSS and L2L5 system
- Navigation device
- Telematics box
- Fleet management

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:



Description: 18184+25254 GNSS&L2L5
Stack Patch Antenna

PART NUMBER : ANT1825BS0XTGN25S

ELECTRICAL SPECIFICATIONS

Working Frequency	L5 : 1176 MHz
	L2 : 1227 MHz
	GNSS-Beidou : 1561 MHz
	GNSS-GPS : 1575 MHz
Gain(Peak)	GNSS-Glonass : 1602 MHz
	L5: 2.3 dBi
	L2 : 2.8 dBi
	GNSS Beidou : 3.4 dBic
Gain(Average)	GNSS GPS : 3.6 dBic
	GNSS Glonass : 4.2 dBic
	L5: -1.84 dB
	L2 : -1.54 dB
Polarization	GNSS Beidou : -1.77 dB
	GNSS GPS : -1.48 dB
	GNSS Glonass : -1.06 dB
	L5 & L2 : LP
Axial Ratio	GNSS : RHCP
	GNSS Beidou \leq 11 dB
	GNSS GPS \leq 13 dB
	GNSS Glonass \leq 19 dB
Impedance	50 Ω
Operating Temperature	-40 ~ 105 $^{\circ}\text{C}$


NOTE

1. Based on 70×70 mm² square ground plane.
2. Centre frequency will be offset to working frequency while changes of customer's housing and ground plane.

Description: 18184+25254 GNSS&L2L5
Stack Patch Antenna

PART NUMBER : ANT1825BS0XTGN25S

MECHANICAL DRAWING

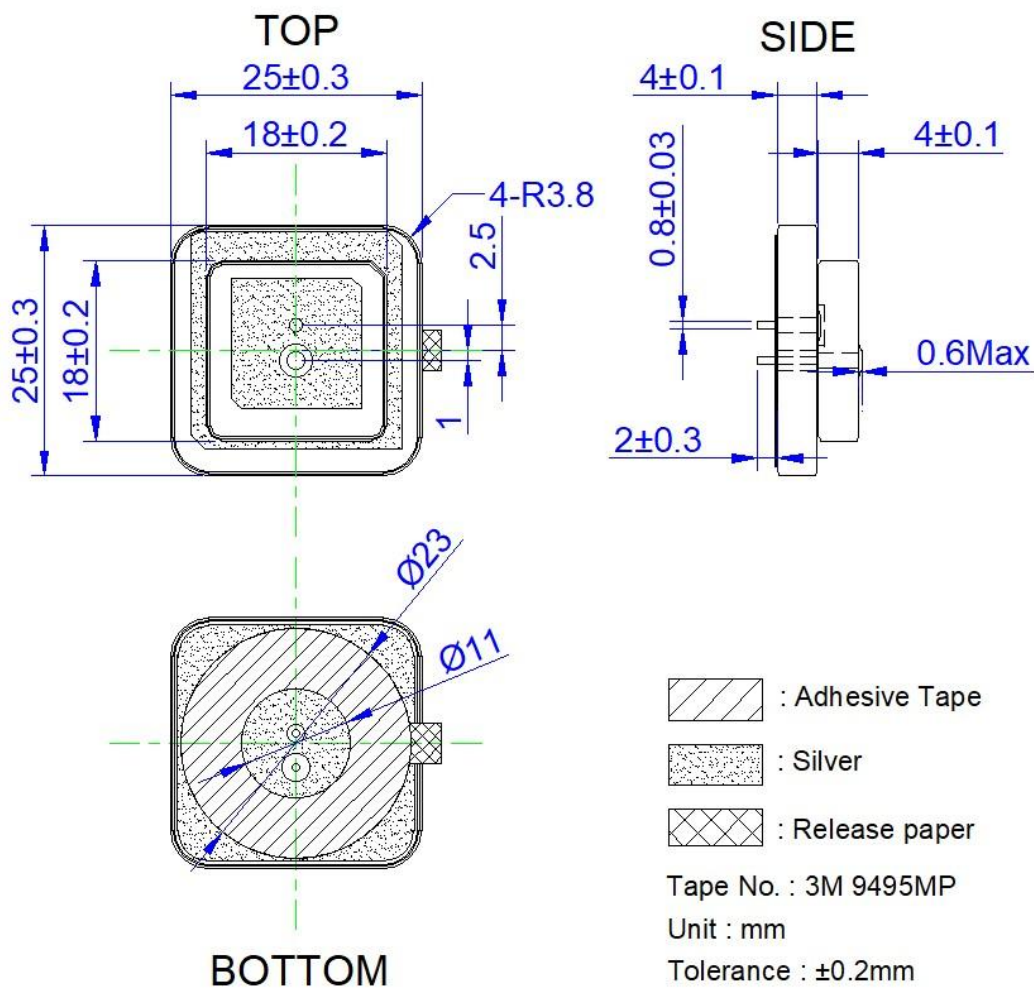

Position	Dimension	Working Band	Feed
Upper	18x18x4 mm	GNSS (1561+1575+1602MHz)	Single Feed
Bottom	25x25x4 mm	L5 & L2 (1176MHz & 1227MHz)	Single Feed

In the effort to improve our products, we reserve the right to make changes judged to be necessary.


CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 18184+25254 GNSS&L2L5
Stack Patch Antenna

PART NUMBER : ANT1825BS0XTGN25S

REFERENCE DESIGN OF EVALUATION BOARD

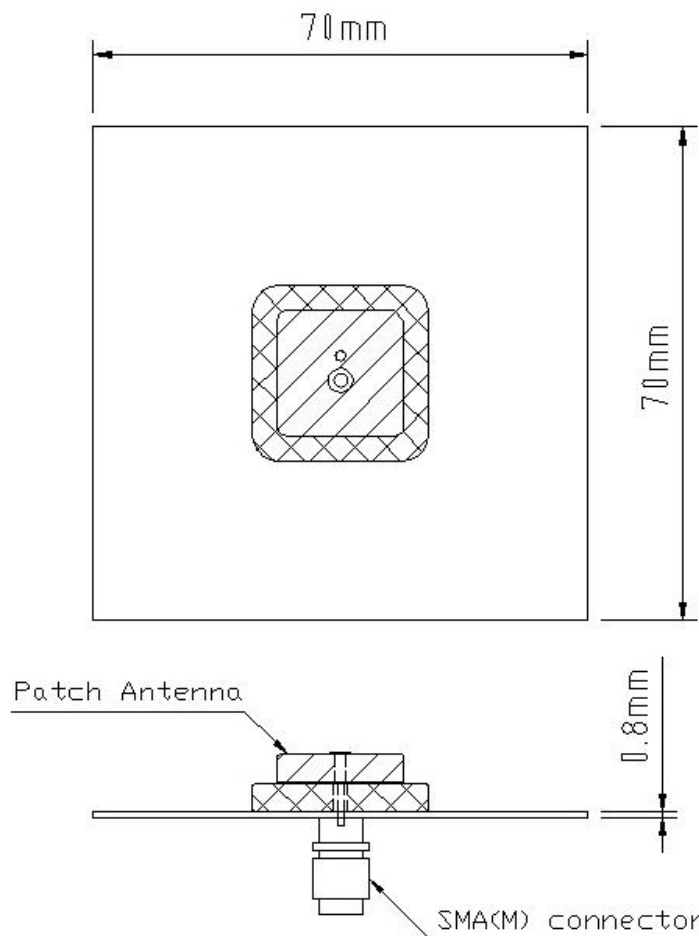

Ground Plane Size: 70x70 mm²

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION


This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 18184+25254 GNSS&L2L5
Stack Patch Antenna


PART NUMBER : ANT1825BS0XTGN25S



FOOTPRINT

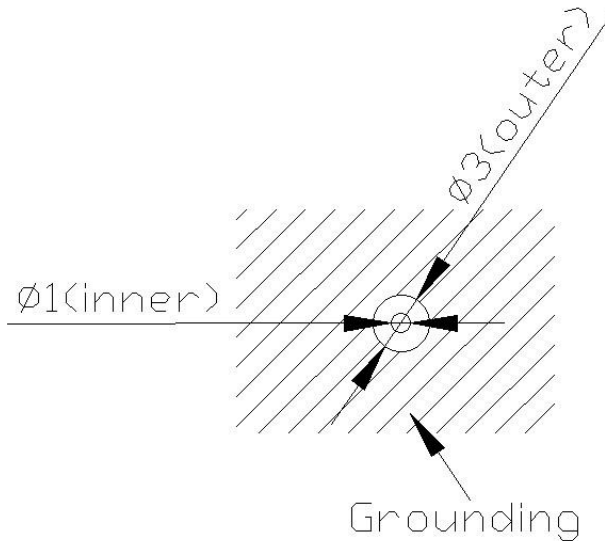Top View

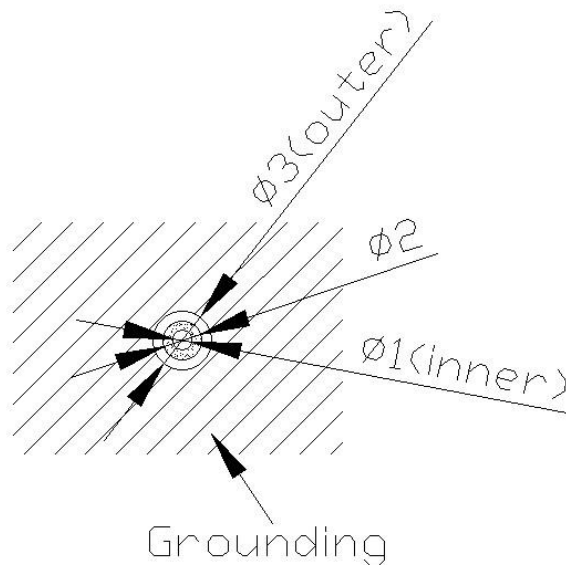

Bottom View




 : Pin feed soldering pad
 : Grounding
 Unit : mm

**Description: 18184+25254 GNSS&L2L5
Stack Patch Antenna**


PART NUMBER : ANT1825BS0XTGN25S

RETURN LOSS

L2 & L5

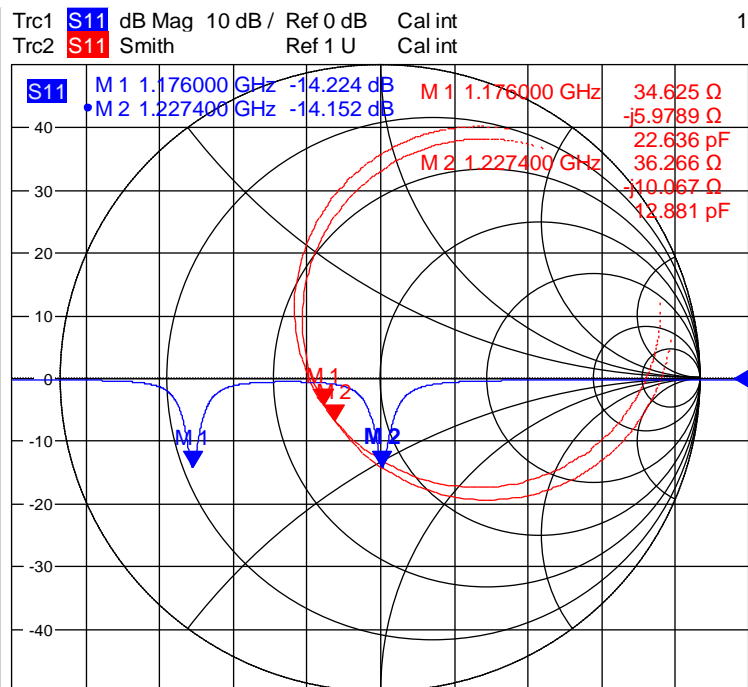

GNSS

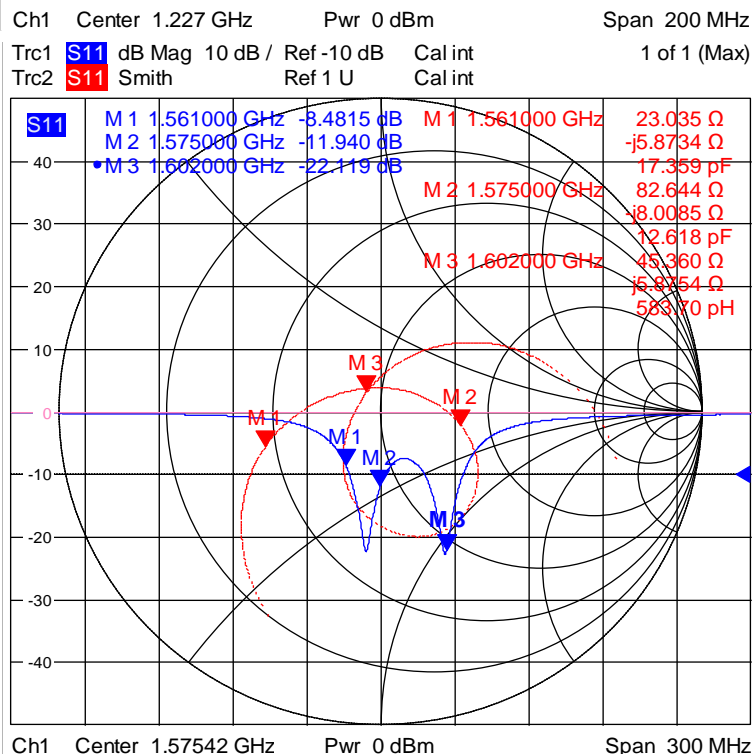

In the effort to improve our products, we reserve the right to make changes judged to be necessary.


CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 18184+25254 GNSS&L2L5
Stack Patch Antenna




PART NUMBER : ANT1825BS0XTGN25S

RADIATION PATTERN



Evaluation board and XYZ direction

L5-1176MHz

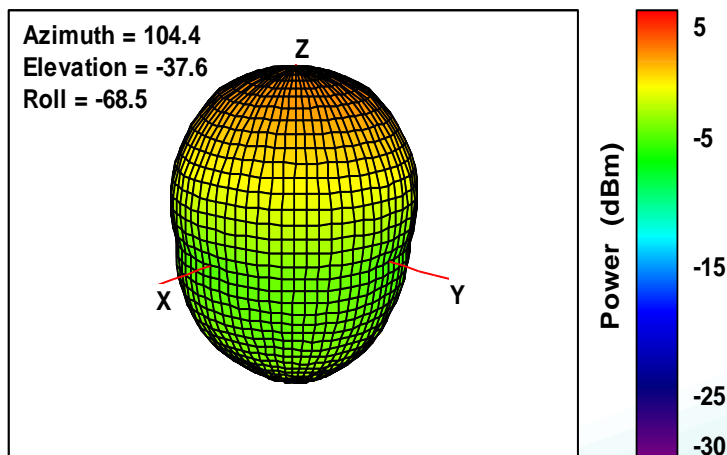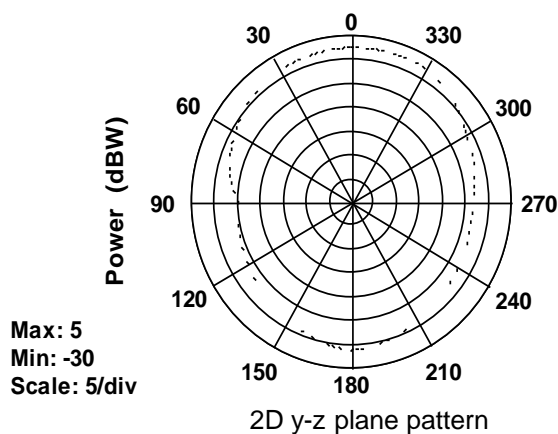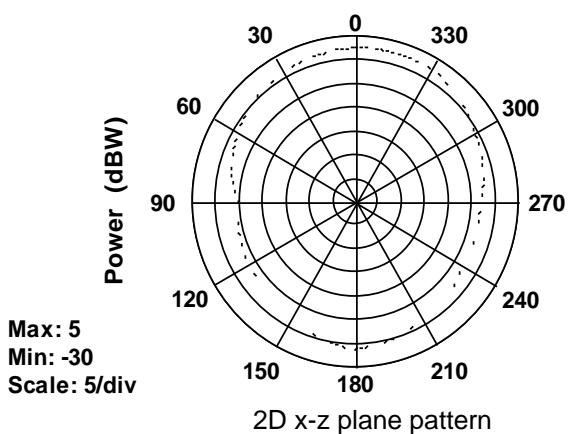

3D radiation pattern

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION


This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 18184+25254 GNSS&L2L5
Stack Patch Antenna


PART NUMBER : ANT1825BS0XTGN25S

RADIATION PATTERN


L2-1227MHz

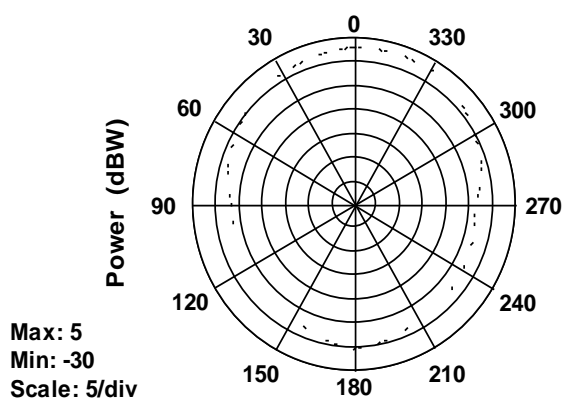

2D x-z plane pattern

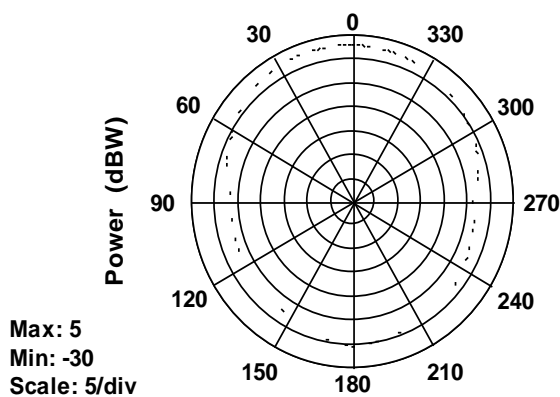

2D y-z plane pattern

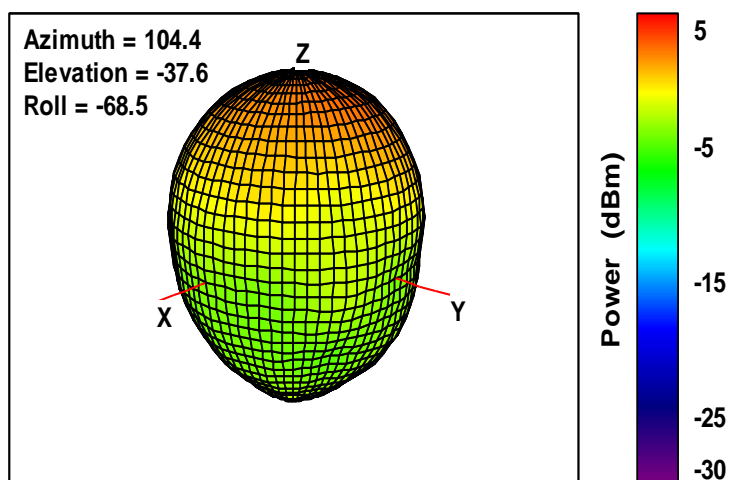


3D radiation pattern

Description: 18184+25254 GNSS&L2L5
Stack Patch Antenna


PART NUMBER : ANT1825BS0XTGN25S

RADIATION PATTERN


GNSS-1561MHz

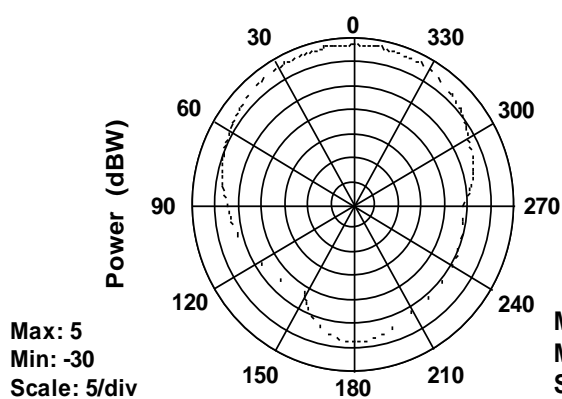

2D x-z plane pattern

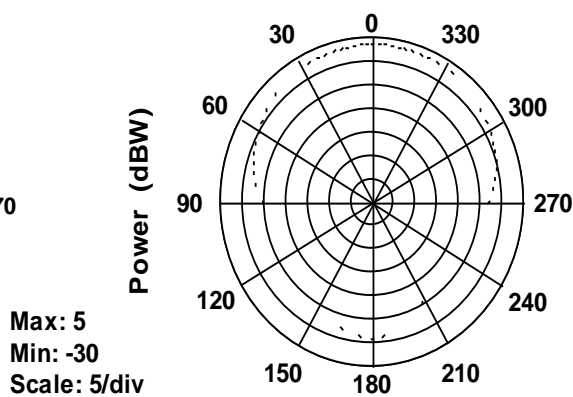

2D y-z plane pattern

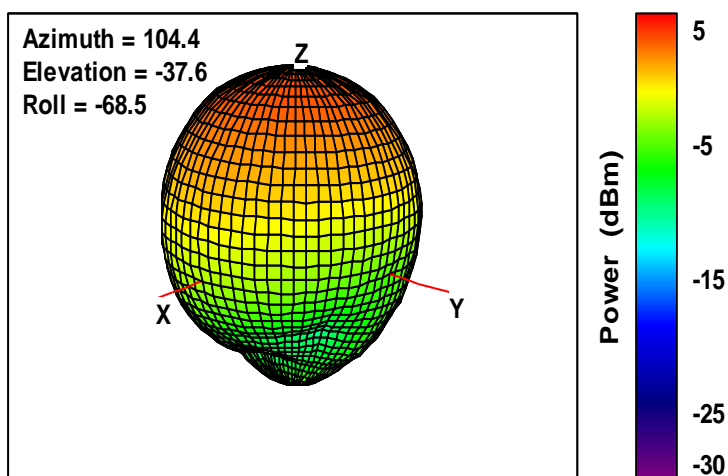




3D radiation pattern

Description: 18184+25254 GNSS&L2L5
Stack Patch Antenna

PART NUMBER : ANT1825BS0XTGN25S

RADIATION PATTERN

GNSS-1575MHz

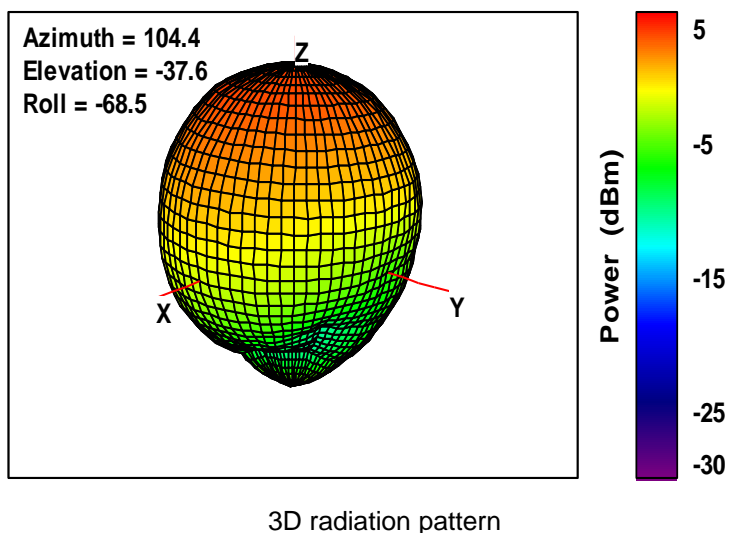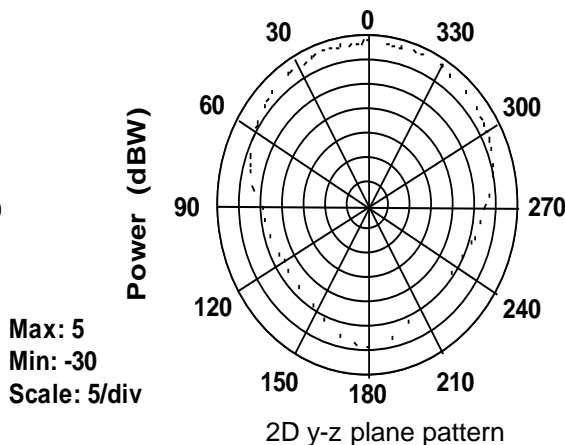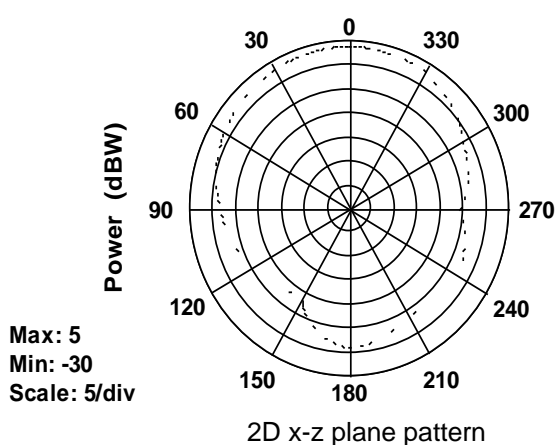


Description: 18184+25254 GNSS&L2L5
Stack Patch Antenna


PART NUMBER : ANT1825BS0XTGN25S

RADIATION PATTERN


GNSS-1602MHz

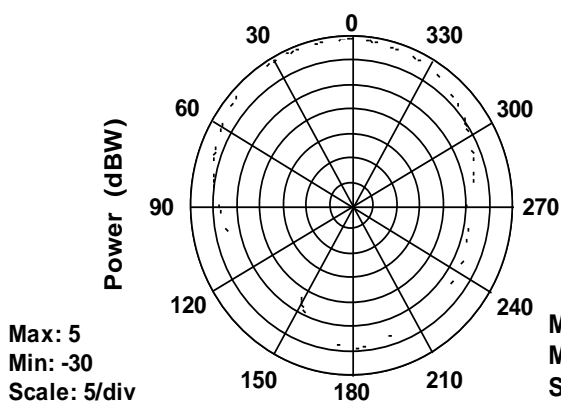

2D x-z plane pattern

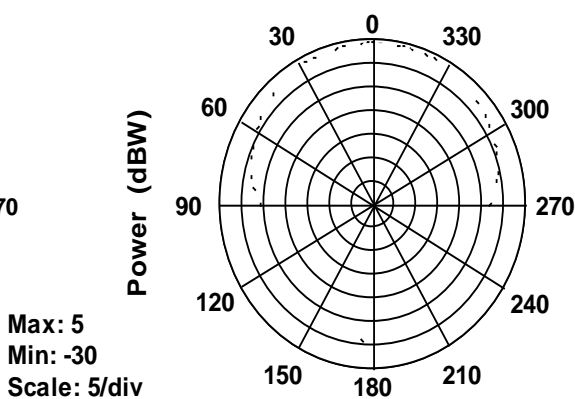

2D y-z plane pattern

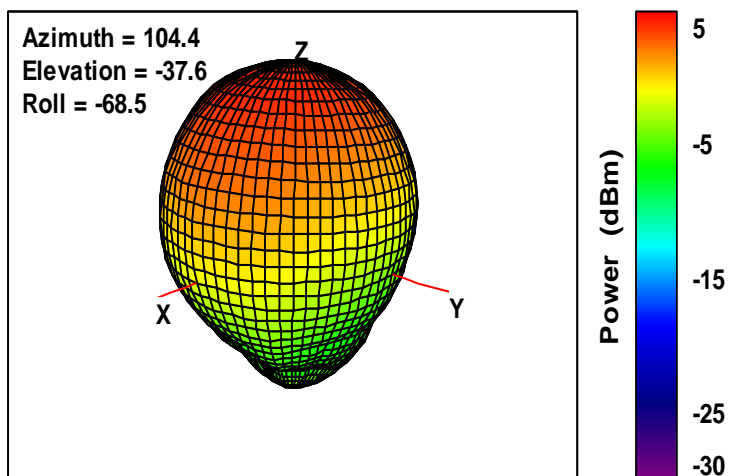

3D radiation pattern

Description: 18184+25254 GNSS&L2L5
Stack Patch Antenna

PART NUMBER : ANT1825BS0XTGN25S

REVISION HISTORY

Revision	Date	Description
Version 1	Jun. 24	- New issue